



Floorstand, closed, keyway connection

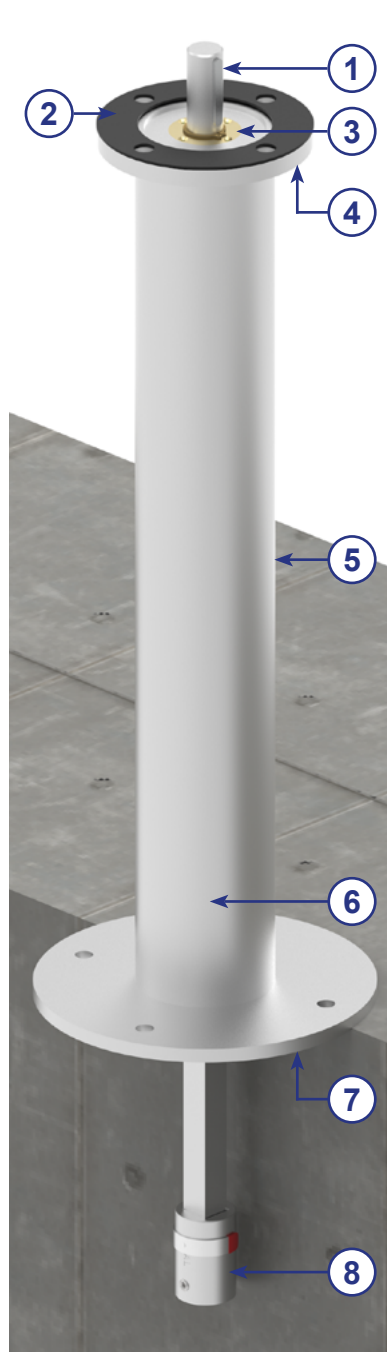

Installation example

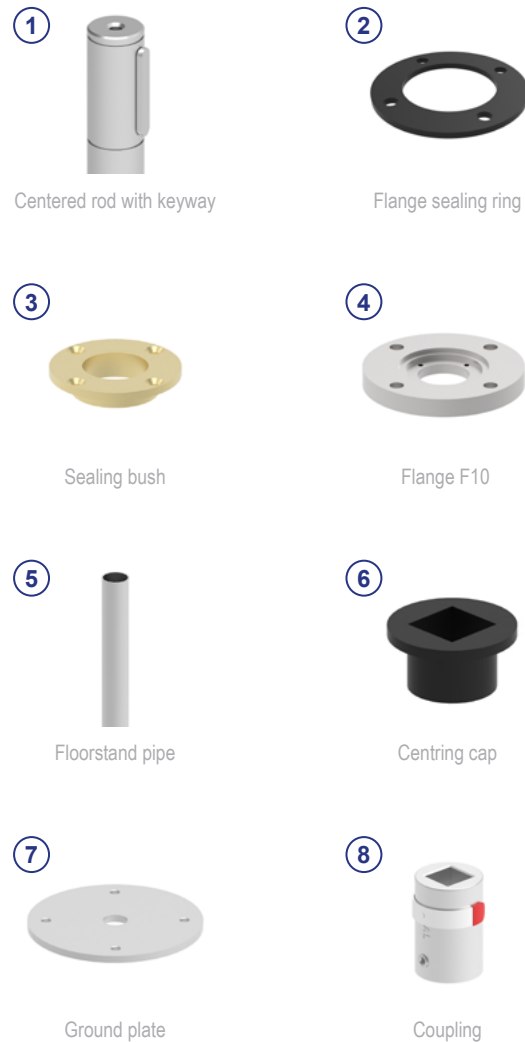

Connection according to EN ISO 5210			
Measurements	F10	F14	F16
Øa	Ø20 mm	Ø30 mm	Ø40
Feather key	40x6 mm	50x8 mm	56x8 mm



Standard-Set-Selection

! Connection version - Complete floorstand (Please tick/complete):



Connection F10 with
shaft Ø20 mm



Connection F14 with
shaft Ø30 mm



Connection F16 with
shaft Ø40 mm

1 Length (L) (Please tick/complete):

Standard length (L):

Material: 1.4301 (V2A)

L0,85 m

2 Connection below (Please tick):

Coupling incl. 2xClip-pins:

DN40/50 | SQ14/17 | Connection top: 25 mm | Article No.: 12138.25-VK-VA

DN65/80 | SQ17/19 | Connection top: 25 mm | Article No.: 12332.00-VK-VA

DN100-150 | SQ19/22 | Connection top: 25 mm | Article No.: 12333.00-VK-VA

DN175/200 | SQ24/27 | Connection top: 30 mm | Article No.: 12140.00-VK-VA

DN250-350 | SQ27/32 | Connection top: 30 mm | Article No.: 12131.00-VK-VA



Coupling incl. 1xClip-pin and 1xSet screw:

Shaft Ø16 mm | Connection top: 30 mm | Article No.: 20416.16-VK-VA

Shaft Ø18 mm | Connection top: 30 mm | Article No.: 20416.18-VK-VA

Shaft Ø20 mm | Connection top: 30 mm | Article No.: 20416.20-VK-VA

Shaft Ø22 mm | Connection top: 30 mm | Article No.: 20416.22-VK-VA

Shaft Ø25 mm | Connection top: 30 mm | Article No.: 20416.25-VK-VA


Shaft Ø30 mm | Connection top: 30 mm | Article No.: 13746.30-VK-VA

Shaft Ø42 mm | Connection top: 30 mm | Article No.: 22911



Coupling as connection incl. 1xClip-pin and 1xSet screw:

Cylindrical 25/25 mm | Connection top: 25 mm | Article No.: 14305.00-VK-VA

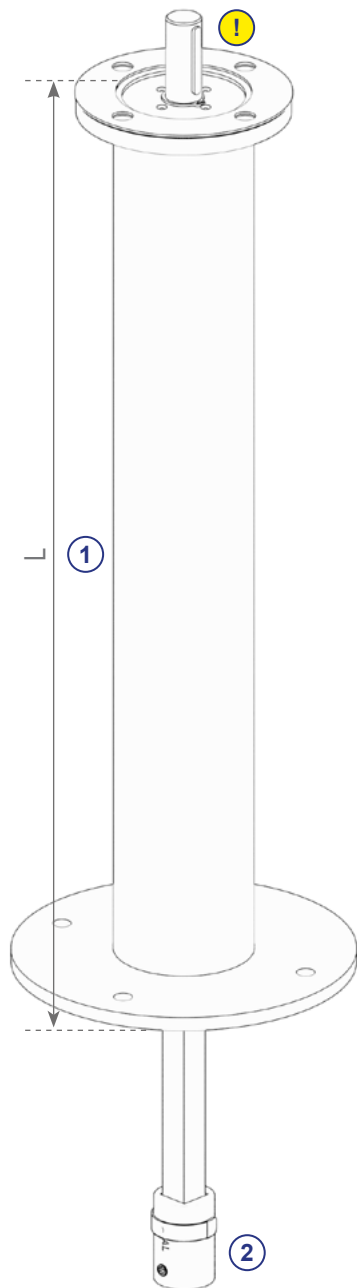

Remarks:

send



Subject to technical modifications!