
FLOORSTANDS



\Diamond

Floorstand, open with sealing bush

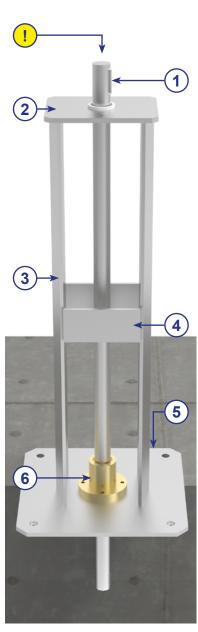

Installation example





Connection version 3: Position indicator



Rod with keywayed attachment



Steel plate support



Ground plate



Connection version 2: Handwheel



Connection version 4: Actuator



Head plate suitable for square connection



Steel plate side supports



Sealing bush

20

FLOORSTANDS



Standard-Set-Selection





Square cap SQ27/32 with set screw suitable for shaft Ø30 mm | Article No.: 12130.30-VK-VA

Handwheel Ø400 mm DN250-350 SQ27/32 | Article No.: 13893.00 Screw set M12x20 mm incl. bolt and washer | Article No.: 10174 Mechanical position indicator, aluminium | Square insert 26 mm:

Turns/stroke 13 | Article No.: 13910.26 Turns/stroke 47 | Article No.: 13909.26 Turns/stroke 140 | Article No.: 13907.26 Turns/stroke 470 | Article No.: 13908.26 Turns/stroke 1390 | Article No.: 13918.26

Mechanical position indicator, stainless steel | Square insert 26 mm:

Turns/stroke 14 | Article No.: 13026.14RZW Turns/stroke 47 | Article No.: 13026.47RZW Turns/stroke 140 | Article No.: 13026.140RZW Turns/stroke 470 | Article No.: 13026.470RZW

Electrical position indicator, stainless steel | Square insert 26 mm:

Turns/stroke 14 | Article No.: 13026.14EZW Turns/stroke 47 | Article No.: 13026.47EZW Turns/stroke 140 | Article No.: 13026.140EZW Turns/stroke 470 | Article No.: 13026.470EZW



Version 1 - with head plate suitable for square insert:

Material: 1.4301 (V2A)

(2)

0

(3)

L0,85 m | Article No.: 19005.V2A

Version 2 - with head plate suitable for actuator EN ISO 5210:

Material: 1.4301 (V2A)

L0,85 m | F10 | Article No.: 19005.F10.V2A L0,85 m | F14 | Article No.: 19005.F14.V2A

(3) Connection below (Please tick/complete):

Coupling incl. 1xClip-pin and 1xSet screw:

Shaft Ø20 mm | Connection bottom: 30 mm | Article No.: 20416.20-VK-VA Shaft Ø30 mm | Connection bottom: 30 mm | Article No.: 13746.30-VK-VA





Remarks:



www.dalminex.de