

Telescopic column extension - waterproof



!



Connection version 1:
Square cap

!



Connection version 2:
Handwheel

!



Connection version 3:
Position indicator

!



Connection version 4:
Actuator

1



Flange sealing ring F10

2



Flange F10

3



Telescopic pipe

4




Seal with steel straps

5



Round tube with screws

6




Flange similar F10

scan me!



Standard-Set-Selection

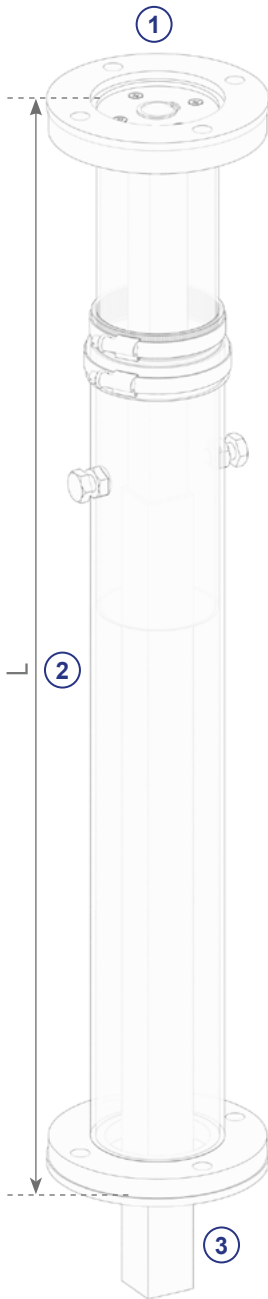

① Connection on top (Please tick/complete):

Shaft adapter Ø20 mm / 6 mm | Article No.: 21623

Shaft adapter Ø30 mm / 8 mm | Article No.: 21624

Square cap SQ27/32 with set screw | Article No.: 12109.07-VK-SS

Square cap SQ27/32 with shaft Ø20 mm / 6 mm, with set screw | Article No.: 12130.20-VK-VA

Square cap SQ27/32 with shaft Ø30 mm / 8 mm, with set screw | Article No.: 12130.30-VK-VA

Handwheel Ø400 mm DN250-350 SQ27/32 | Article No.: 13893.00

Screw set M12x20 mm incl. bolt and washer | Article No.: 10174

Mechanical position indicator, aluminium | Square insert 26 mm:

Turns/stroke 13 | Article No.: 13910.26

Turns/stroke 47 | Article No.: 13909.26

Turns/stroke 140 | Article No.: 13907.26

Turns/stroke 470 | Article No.: 13908.26

Turns/stroke 1390 | Article No.: 13918.26

Mechanical position indicator, stainless steel | Square insert 26 mm:

Turns/stroke 14 | Article No.: 13026.14RZW

Turns/stroke 140 | Article No.: 13026.140RZW

Turns/stroke 47 | Article No.: 13026.47RZW

Turns/stroke 470 | Article No.: 13026.470RZW

Electrical position indicator, stainless steel | Square insert 26 mm:

Turns/stroke 14 | Article No.: 13026.14EZW

Turns/stroke 140 | Article No.: 13026.140EZW

Turns/stroke 47 | Article No.: 13026.47EZW

Turns/stroke 470 | Article No.: 13026.470EZW

② Length (L) (Please tick/complete):

Standard lengths (L):

Material: 1.4301

F10:

L1,00 - 1,80 m | Article No.: 22183.00

L1,80 - 2,80 m | Article No.: 22183.01

F14:

L1,00 - 1,80 m | Article No.: 22183.00.F14

L1,80 - 2,80 m | Article No.: 22183.01.F14

Material: S235JR

F10:

L1,00 - 1,80 m | Article No.: 22183.00.VZ

F14:

L1,00 - 1,80 m | Article No.: 22183.00.VZ.F14

③ Connection below (Please tick):

Coupling incl. 2xClip-pins:

DN40/50 | SQ14/17 | Connection top: 25 mm | Article No.: 12138.25-VK-VA

DN65/80 | SQ17/19 | Connection top: 25 mm | Article No.: 12332.00-VK-VA

DN100-150 | SQ19/22 | Connection top: 25 mm | Article No.: 12333.00-VK-VA

DN175/200 | SQ24/27 | Connection top: 30 mm | Article No.: 12140.00-VK-VA

DN250-350 | SQ27/32 | Connection top: 30 mm | Article No.: 12131.00-VK-VA



Coupling incl. 1xClip-pin and 1xSet screw:

Shaft Ø16 mm | Connection top: 30 mm | Article No.: 20416.16-VK-VA

Shaft Ø18 mm | Connection top: 30 mm | Article No.: 20416.18-VK-VA

Shaft Ø20 mm | Connection top: 30 mm | Article No.: 20416.20-VK-VA

Shaft Ø22 mm | Connection top: 30 mm | Article No.: 20416.22-VK-VA

Shaft Ø25 mm | Connection top: 30 mm | Article No.: 20416.25-VK-VA

Shaft Ø30 mm | Connection top: 30 mm | Article No.: 13746.30-VK-VA

Shaft Ø42 mm | Connection top: 30 mm | Article No.: 22911



Coupling as connection incl. 1xClip-pin and 1xSet screw:

Cylindrical 25/25 mm | Connection top: 25 mm | Article No.: 14305.00-VK-VA



send

Remarks:

Subject to technical modifications!

