




Bracket headstock

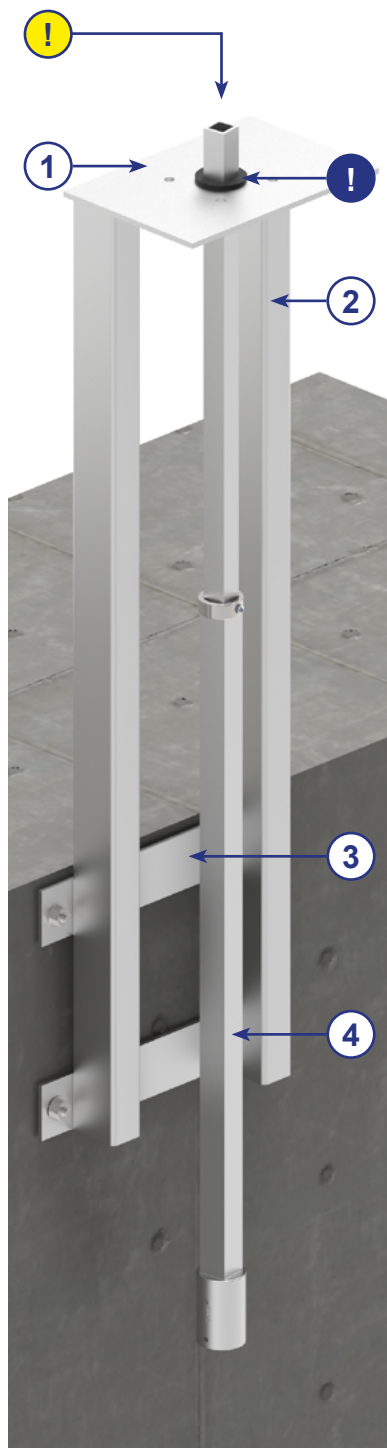

Installation example



Connection version 1:
Square cap



Connection version 2:
Handwheel




Connection version 3:
Position indicator




Connection version 4:
Actuator



Centring cap
(optional)



Head plate for rod



Bracket headstock
construction



Wall mounting



Adjustable extension

scan me!



Standard-Set-Selection

① Bracket headstock - Variante (Please tick/complete):

Bracket headstock suitable for rod | L1,30 m | Article No.: 21294

with centring cap for rod □25mm | Article No.: 13861.26

Bracket headstock suitable for actuator, similar F10 | L1,30 m | Article No.: 21294.F10

Bracket headstock suitable for actuator, similar F14 | L1,30 m | Article No.: 21294.F14



② Connection on top (Please tick/complete):

Square cap SQ27/32 with set screw | Article No.: 12109.06-VK-SS

Shaft adapter Ø20 mm / 6 mm | Article No.: 21623

Shaft adapter Ø30 mm / 8 mm | Article No.: 21624

Square cap SQ27/32 with shaft Ø20 mm / 6 mm, with set screw | Article No.: 12130.20-VK-VA

Square cap SQ27/32 with shaft Ø30 mm / 8 mm, with set screw | Article No.: 12130.30-VK-VA

Handwheel Ø400 mm DN250-350 SQ27/32 | Article No.: 13893.00

Screw set M12x20 mm incl. bolt and washer | Article No.: 10174

Mechanical position indicator, stainless steel | Square insert 26 mm:

Turns/stroke 14 | Article No.: 13026.14RZW

Turns/stroke 47 | Article No.: 13026.47RZW

Turns/stroke 140 | Article No.: 13026.140RZW

Turns/stroke 470 | Article No.: 13026.470RZW

③ Adjustable extension (Please tick/complete):

Standard lengths (L) | Square tube: upper: 25x25 mm | lower: 30x30 mm:

Material: 1.4301 (V2A)

Material: 1.4301 (V4A)

L0,50 - 0,75 m | Article No.: 17400.V2A

L0,50 - 0,75 m | Article No.: 17400.V4A

L0,70 - 1,15 m | Article No.: 17401.V2A

L0,70 - 1,15 m | Article No.: 17401.V4A

L1,00 - 1,75 m | Article No.: 17402.V2A

L1,00 - 1,75 m | Article No.: 17402.V4A

L1,20 - 2,20 m | Article No.: 17403.V2A

L1,20 - 2,20 m | Article No.: 17403.V4A

L1,50 - 2,60 m | Article No.: 17404.V2A

L1,50 - 2,60 m | Article No.: 17404.V4A

L1,90 - 3,50 m | Article No.: 17405.V2A

L1,90 - 3,50 m | Article No.: 17405.V4A

L2,20 - 4,00 m | Article No.: 22971.V2A

L2,20 - 4,00 m | Article No.: 22971.V4A

L2,60 - 5,00 m | Article No.: 22970.V2A

L2,60 - 5,00 m | Article No.: 22970.V4A

L3,20 - 5,50 m | Article No.: 17406.V2A

L3,20 - 5,50 m | Article No.: 17406.V4A

L3,60 - 6,50 m | Article No.: 22972

L4,30 - 7,70 m | Article No.: 20522

L4,30 - 7,70 m | Article No.: 11738

④ Connection below (Please tick):

Coupling incl. 2xClip-pins:

DN40/50 | SQ14/17 | Connection top: 25 mm | Article No.: 12138.25-VK-VA

DN65/80 | SQ17/19 | Connection top: 25 mm | Article No.: 12332.00-VK-VA

DN100-150 | SQ19/22 | Connection top: 25 mm | Article No.: 12333.00-VK-VA

DN175/200 | SQ24/27 | Connection top: 30 mm | Article No.: 12140.00-VK-VA

DN250-350 | SQ27/32 | Connection top: 30 mm | Article No.: 12131.00-VK-VA



Coupling incl. 1xClip-pin and 1xSet screw:

Shaft Ø16 mm | Connection top: 30 mm | Article No.: 20416.16-VK-VA

Shaft Ø18 mm | Connection top: 30 mm | Article No.: 20416.18-VK-VA

Shaft Ø20 mm | Connection top: 30 mm | Article No.: 20416.20-VK-VA

Shaft Ø22 mm | Connection top: 30 mm | Article No.: 20416.22-VK-VA

Shaft Ø25 mm | Connection top: 30 mm | Article No.: 20416.25-VK-VA

Shaft Ø30 mm | Connection top: 30 mm | Article No.: 13746.30-VK-VA

Shaft Ø42 mm | Connection top: 30 mm | Article No.: 22911



Coupling as connection incl. 1xClip-pin and 1xSet screw:

Cylindrical 25/25 mm | Connection top: 25 mm | Article No.: 14305.00-VK-VA



send



Subject to technical modifications!