



Mechanical position indicator, aluminium

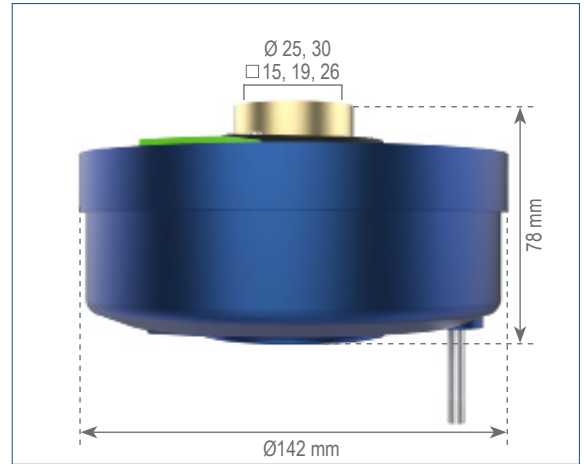

①

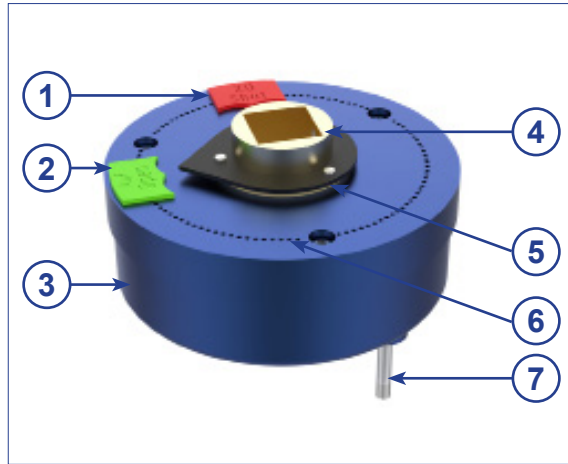


Marking-pin red (close)
Material: PA
Replaceable spare part

②



Marking-pin green (open)
Material: PA
Replaceable spare part

③



Body
(Powder coating)
Material: Cast aluminium

④




Adapter with Centring-hole for square / keyway spindle extensions
Material: Cast zinc

⑤




Pointer, black
Material: S235JR epoxy

⑥



Lid with circle of holes for marking-pins
(Powder coating)
Material: Cast aluminium

⑦



Anchoring-pin for protective-tube cap or DALMINEX supporting-plate
Material: 1.4301

scan me!



Mechanical position indicator, aluminium

max. turns/stroke	Round insert diameter		Square insert			Weight
	Ø25 mm	Ø30 mm	□ 15 mm	□ 19 mm	□ 26 mm	
13	13910.25	13910	13910.15	13910.19	13910.26	1.7 kg
47	13909.25	13909	13909.15	13909.19	13909.26	1.7 kg
140	13907.25	13907	13907.15	13907.19	13907.26	1.7 kg
470	13908.25	13908	13908.15	13908.19	13908.26	1.7 kg
1390	13918.25	13918	13918.15	13918.19	13918.26	1.7 kg



DALMINEX installation system

DALMINEX support plate (suitable for position indicators)		
Material	Article No.	Weight
Plastic	12601.01	14.0 kg



DALMINEX fixing disc suitable for DALMINEX support plate		
Material	Article No.	Weight
Plastic	12602.01	1.16 kg



Surface box acc. to DIN 4056 Type 2		
Material	Article No.	Weight
Plastic	4056-2.WK	12.1 kg



alternatively

Surface box acc. to DIN 4056 Type 2 adjustable		
Material	Article No.	Weight
Plastic	4056-2.WK-V	12,5 kg



Full function and warranty through professional installation of the DALMINEX installation system.



Replaceable spare part

Description	Article No.	Weight
Marking-pin-set, open/shut, green/red	13904	0.01 kg

Attention! DALMINEX position indicators cannot subsequently be installed on unprepared spindle extensions!

Subject to technical modifications!