


Telescopic spindle extension T3




1 Square cap SQ12/14



2 Centring cap



3 Tubes



4 Transport lock



5 PE-brake




6 Combi bell




7 Coupling



8 Clip-pin



9 Bell adapter

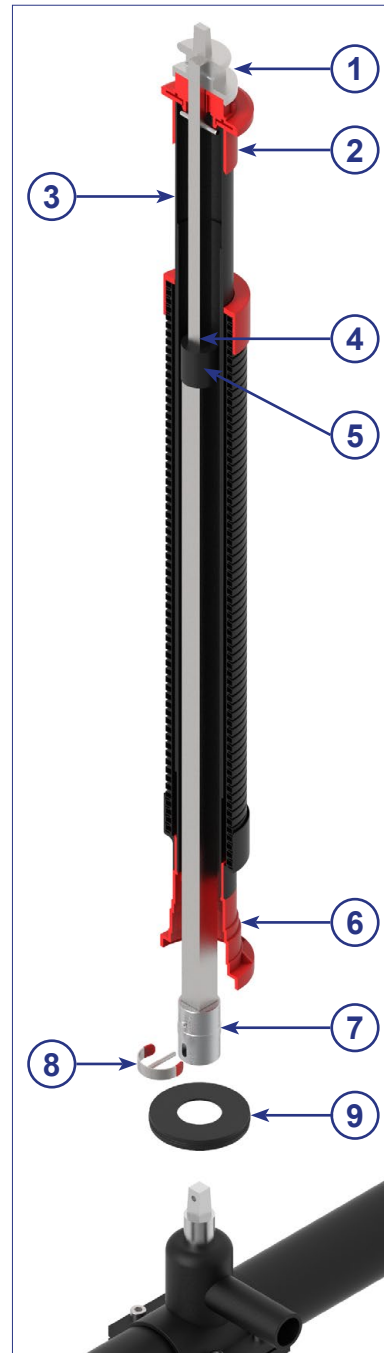

Valve Spindle square	CD* Cover depth	Total length (L)** Spindle extension	Article No.	Weight	PU
Service Valve SQ12	0.70 - 1.00 m	0.47 - 0.73 m	10088.T3	2.0 kg	100
	0.85 - 1.30 m	0.62 - 1.02 m	14004.T3	2.5 kg	100
	1.00 - 1.50 m	0.78 - 1.33 m	14005.T3	3.0 kg	70
	1.25 - 1.80 m	0.93 - 1.63 m	14006.T3	3.5 kg	70
	1.50 - 2.00 m	1.03 - 1.80 m	14007.T3	4.0 kg	70
	1.70 - 2.70 m	1.42 - 2.38 m	14094.T3	5.0 kg	-

PU = Deliveries only possible in packaging units!

*Cover depth measurements depend on the height of the valve used, see p. 11.

**Other lengths available upon request.

Subject to technical modifications!

scan me!

