


Telescopic spindle extension T3 DVGW GW336



①

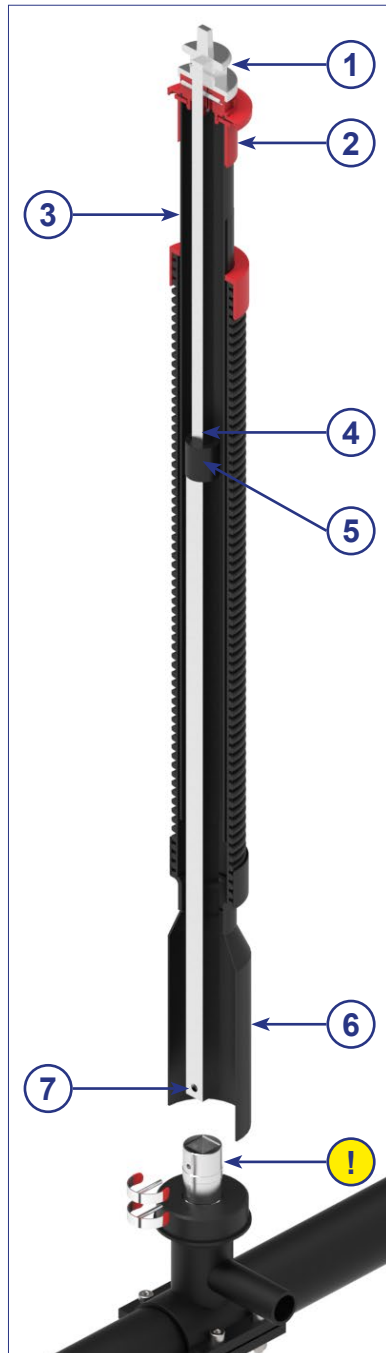

Square cap SQ12/14
as per DVGW GW336

②



Centring cap

③



Tubes

④



Transport lock 150N
as per DVGW GW336

⑤



PE-brake

⑥




Round bell
as per DVGW GW336

⑦



Square bar with
drilling as per
DVGW GW336

!



Adapter set p.35
(optional)

Valve	Operating head	Connection to coupling	Total length (L)* Spindle extension	Type 1 (140 Nm)		Type 2 (100 Nm)	
				Article No.	Weight	Article No.	Weight
Service valve DN ≤ 50 Ball valve DN ≤ 50	DIN 3223 E	SQ20x20 mm Ø80 mm	0.40 - 0.65 m	13997.GW336	1.4 kg	13997.01.GW336	1.4 kg
			0.65 - 1.15 m	14008.GW336	2.6 kg	14008.01.GW336	2.2 kg
			0.80 - 1.45 m	14009.GW336	3.4 kg	14009.01.GW336	2.9 kg
			0.90 - 1.55 m	14010.GW336	3.7 kg	14010.01.GW336	3.1 kg
			1.37 - 2.45 m	14089.GW336	5.1 kg	14089.01.GW336	4.4 kg

*Other lengths available upon request.

Telescopic spindle extensions are as per the DVGW worksheet GW336-1 (A) (09/2010)
Testing as per DVGW test schedule GW336-2 (P) (09/2010)

scan me!



Subject to technical modifications!