


Telescopic spindle extension T3 - stainless steel



Centring cap



Tubes



Transport lock



PE-brake



Combi bell




Coupling



Clip-pin



Bell adapter

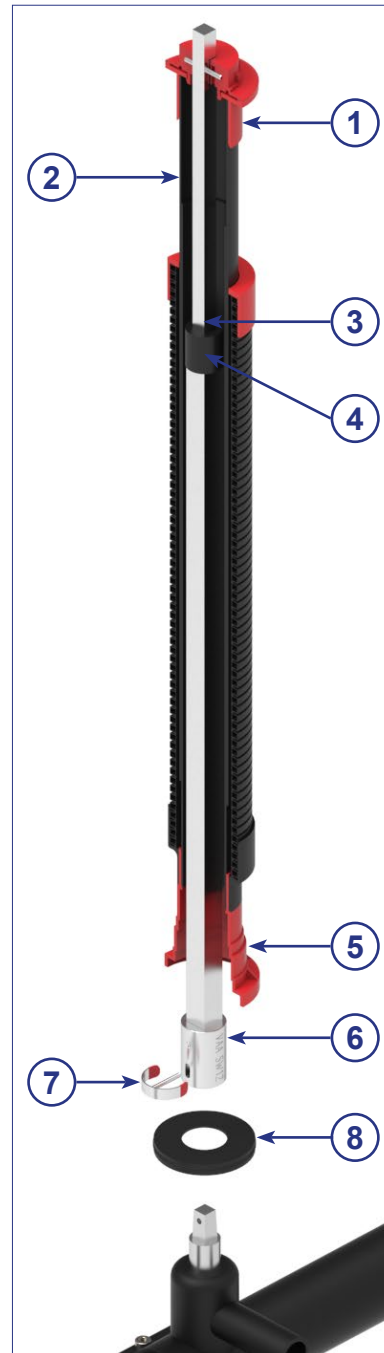

Valve Spindle square	CD* Cover depth	Total length (L)** Spindle extension	Article No.	Weight
Service valve SQ12	0.55 - 0.70 m	0.28 - 0.41 m	14095.VA	1.3 kg
	0.70 - 1.00 m	0.43 - 0.69 m	10088.VA	1.7 kg
	0.85 - 1.30 m	0.58 - 0.98 m	14004.VA	2.3 kg
	1.00 - 1.50 m	0.78 - 1.31 m	14005.VA	2.8 kg
	1.25 - 1.80 m	0.89 - 1.59 m	14006.VA	3.4 kg
	1.50 - 2.00 m	0.99 - 1.76 m	14007.VA	3.6 kg
	1.70 - 2.70 m	1.38 - 2.34 m	14094.VA	4.9 kg

*Cover depth measurements depend on the height of the valve used, see p. 11.

**Other lengths available upon request.

Subject to technical modifications!

scan me!

