


Telescopic Spindle Extension T3 for Service valves with screw bell




①

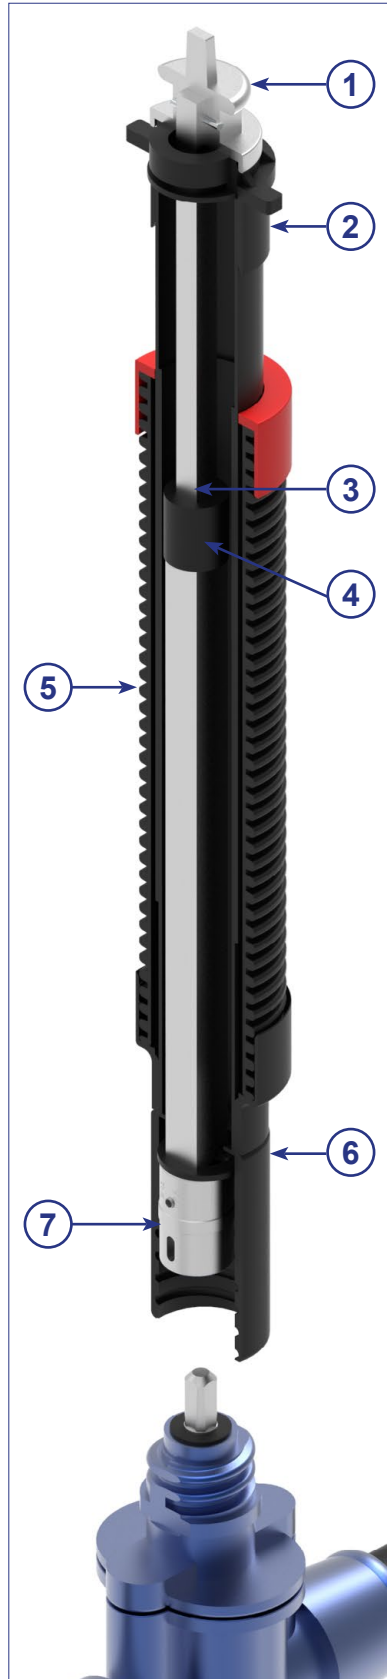

Square cap

②



Centring cap

③



Transport lock

④



PE-brake

⑤



Tubes

⑥



PE-Screw bell

⑦



Coupling

scan me!



Telescopic Spindle Extension T3 for Service valves with screw bell



Valve Spindle square	CD* Cover depth	Article No.	Weight
Service valve SQ12	0.75 - 1.10 m	14072.HAW	2.3 kg
	1.00 - 1.50 m	14073.HAW	3.1 kg
	1.30 - 2.00 m	14074.HAW	3.8 kg
	1.50 - 2.50 m	14075.HAW	4.5 kg


*Other lengths available upon request.

PE-screw bell with suitable connection to valve.
The screw connection is without connecting pin.

Special application



Mount the screw bell onto the gate valve and the coupling will be connected to the spindle. The screw connection is without connecting pin.

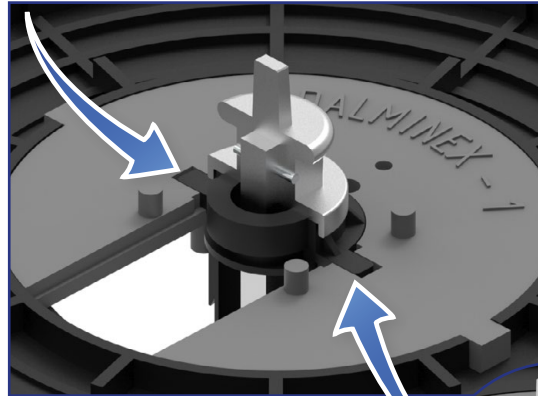

Our wing cap fits perfectly into the DALMINEX installation system. (see p. 87).

