


Tele-EBG T3




① Vierkantschoner SW27/32

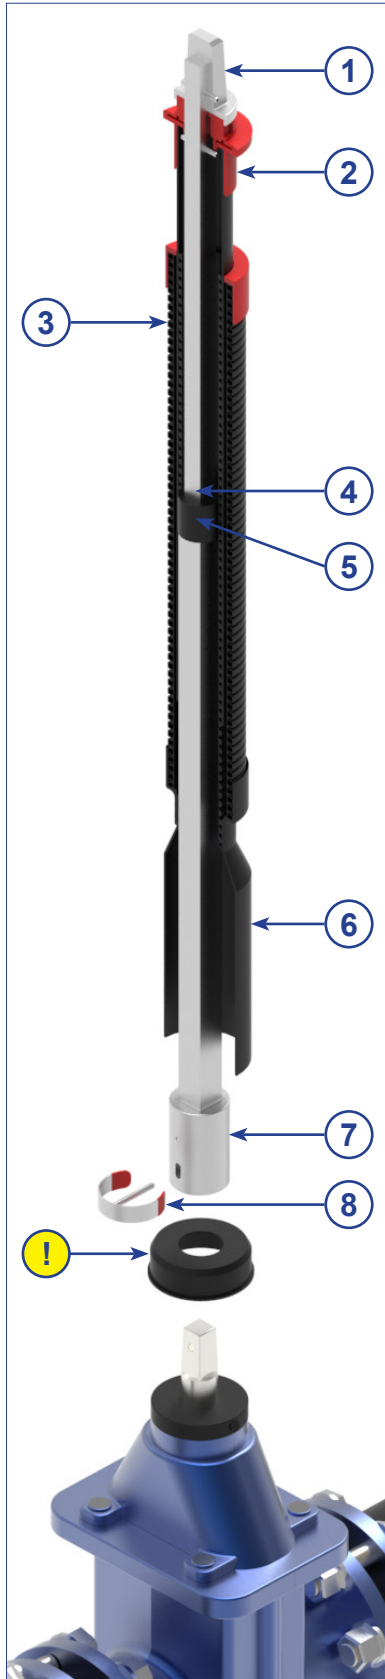

② Zentrierkappe



③ 3-fach Teleskop



④ Auszugssicherung



⑤ PLUS-Sicherung



⑥ Rundglocke



⑦ Kuppelmuffe



⑧ Clip-Stift



⑨ Glockendichteinsatz (optional)



Armatur Spindel-VKT	RD* Rohrdeckung	Gesamtlänge GL** Gestänge	Artikel-Nr.	Gewicht	VE
Schieber DN40/50 SW14	1,00 - 1,50 m	0,70 - 1,20 m	14008.T3	3,8 kg	70
	1,25 - 1,80 m	0,93 - 1,61 m	14009.T3	4,9 kg	70
	1,50 - 2,00 m	1,03 - 1,82 m	14010.T3	5,4 kg	70
	1,70 - 2,70 m	1,40 - 2,56 m	14089.T3	7,1 kg	-
	2,30 - 3,90 m	1,92 - 3,60 m	15901.T3	7,9 kg	-
Schieber DN65/80 SW17	1,00 - 1,50 m	0,69 - 1,14 m	14011.T3	3,9 kg	70
	1,25 - 1,80 m	0,85 - 1,45 m	14012.T3	4,3 kg	70
	1,50 - 2,00 m	0,95 - 1,65 m	14013.T3	4,8 kg	70
	1,70 - 2,70 m	1,32 - 2,41 m	14090.T3	6,9 kg	-
	2,30 - 3,90 m	1,92 - 3,60 m	15902.T3	9,9 kg	-
Schieber DN100-150 SW19	1,00 - 1,20 m	0,54 - 0,84 m	14099.T3	3,2 kg	100
	1,20 - 1,50 m	0,64 - 1,05 m	14014.T3	4,0 kg	70
	1,25 - 1,80 m	0,80 - 1,40 m	14015.T3	4,4 kg	70
	1,50 - 2,00 m	0,95 - 1,64 m	14016.T3	5,0 kg	70
	1,70 - 2,70 m	1,30 - 2,41 m	14091.T3	7,1 kg	-
	2,30 - 3,90 m	1,92 - 3,60 m	15903.T3	10,0 kg	-
Schieber DN175/200 SW24	1,10 - 1,30 m	0,52 - 0,79 m	14017.T3	4,5 kg	80
	1,25 - 1,80 m	0,77 - 1,25 m	14018.T3	6,1 kg	70
	1,50 - 2,00 m	0,86 - 1,46 m	14019.T3	6,8 kg	70
	1,70 - 2,70 m	1,21 - 2,19 m	14092.T3	10,1 kg	-
	2,50 - 3,50 m	1,80 - 2,80 m	15904.T3	12,0 kg	-
Schieber DN250-350 SW27	1,10 - 1,30 m	0,50 - 0,80 m	14020.T3	5,1 kg	80
	1,25 - 1,80 m	0,71 - 1,15 m	14021.T3	6,4 kg	70
	1,50 - 2,00 m	0,86 - 1,45 m	14023.T3	7,3 kg	70
	1,70 - 2,70 m	1,16 - 2,05 m	14093.T3	9,2 kg	-
	2,50 - 3,50 m	1,96 - 3,16 m	15905.T3	12,4 kg	-
Schieber DN400/450 SW32	als Teleskop max. Drehmoment 500Nm				
	1,40 - 1,60 m	0,56 - 0,84 m	15017.T3	6,9 kg	-
	1,60 - 2,05 m	0,76 - 1,22 m	15018.T3	7,1 kg	-
	2,00 - 2,90 m	1,20 - 2,09 m	15019.T3	10,1 kg	-
Schieber DN500/600 SW36	als Teleskop max. Drehmoment 500Nm				
	1,45 - 1,65 m	0,53 - 0,76 m	15021.T3	8,3 kg	-
	1,65 - 2,10 m	0,75 - 1,16 m	15050.T3	9,5 kg	-
	2,10 - 2,70 m	1,13 - 1,86 m	15022.T3	11,9 kg	-
	2,50 - 3,50 m	1,80 - 2,80 m	15907.T3	16,3 kg	-

VE = Lieferung nur in Verpackungseinheiten!

*Rohrdeckungsmaße sind abhängig von der Höhe der eingesetzten Armatur, siehe S. 11.

**Sonderlängen auf Anfrage!