

## Tele-EBG T3




1 Vierkantschoner SW12/14



2 Zentrierkappe



3 3-fach Teleskop



4 Auszugssicherung



5 PLUS-Sicherung




6 Stufenglocke




7 Kuppelmuffe



8 Clip-Stift



9 Glockendichteinsatz

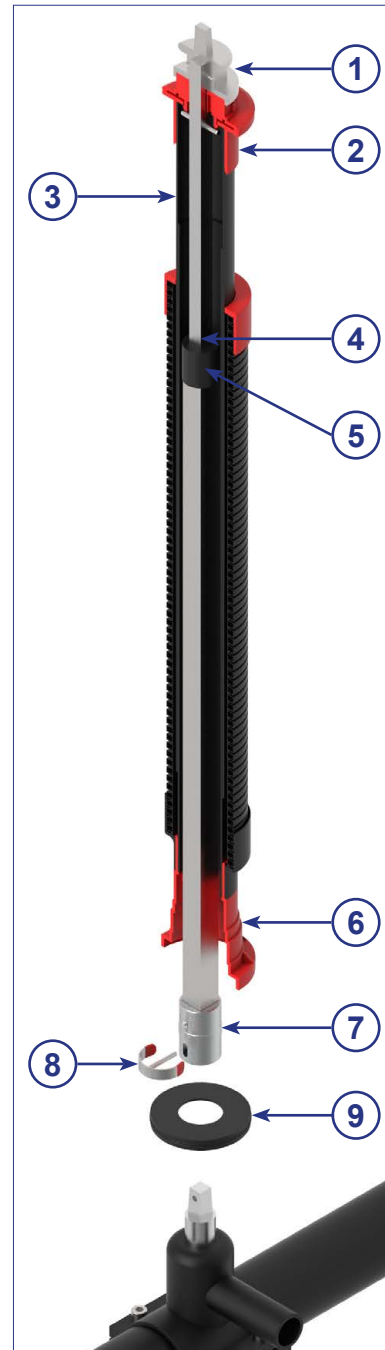

| Armatur<br>Spindel-VKT       | RD*<br>Rohrdeckung | Gesamtlänge GL**<br>Gestänge | Artikel-Nr. | Gewicht | VE<br>(EURO-Gibo) |
|------------------------------|--------------------|------------------------------|-------------|---------|-------------------|
| Anbohrarmatur<br>VAA<br>SW12 | 0,70 - 1,00 m      | 0,47 - 0,73 m                | 10088.T3    | 2,0 kg  | 100               |
|                              | 0,85 - 1,30 m      | 0,62 - 1,02 m                | 14004.T3    | 2,5 kg  | 100               |
|                              | 1,00 - 1,50 m      | 0,78 - 1,33 m                | 14005.T3    | 3,0 kg  | 70                |
|                              | 1,25 - 1,80 m      | 0,93 - 1,63 m                | 14006.T3    | 3,5 kg  | 70                |
|                              | 1,50 - 2,00 m      | 1,03 - 1,80 m                | 14007.T3    | 4,0 kg  | 70                |
|                              | 1,70 - 2,70 m      | 1,42 - 2,38 m                | 14094.T3    | 5,0 kg  | -                 |

**VE = Lieferung nur in Verpackungseinheiten!**

\*Rohrdeckungsmaße sind abhängig von der Höhe der eingesetzten Armatur, siehe S. 11.

\*\*Sonderlängen auf Anfrage!

Technische Änderungen vorbehalten!

scan me!

