


SPINDLE EXTENSIONS FOR GATE VALVES

Telescopic Spindle Extension T3 with position indicator



①

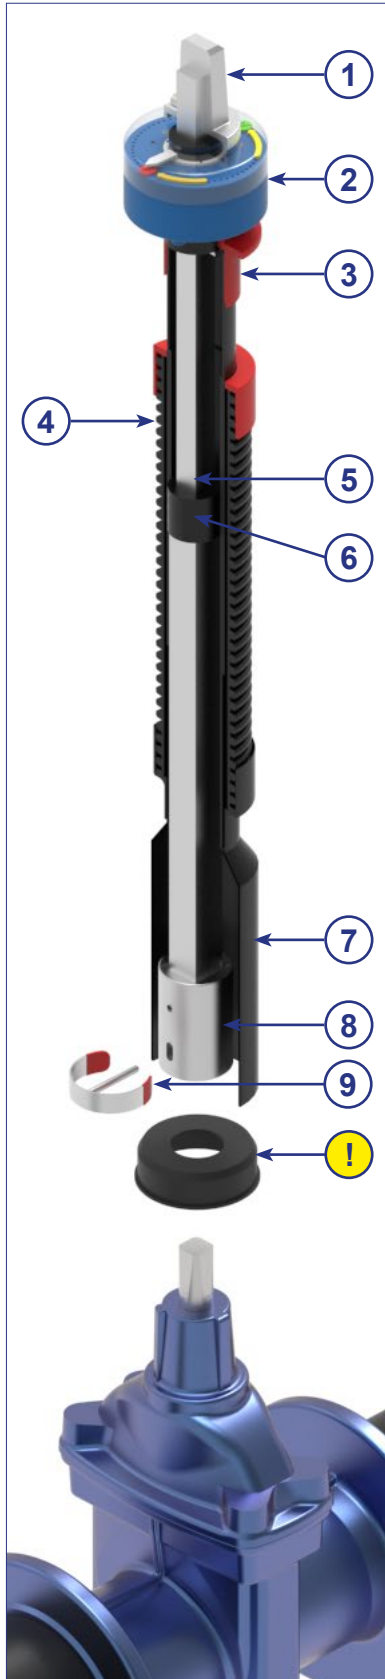

Square cap SQ27/32

②



Position indicator made of plastic

③



Centring cap

④



Tubes

⑤



Transport lock

⑥



PE-brake

⑦



Round bell

⑧



Coupling

⑨



Clip-pin

!



Bell adapter (optional)



Telescopic Spindle Extension T3 with position indicator



Valve Spindle square	CD* Cover depth	Total length (L)** Spindle extension	Article No.	Weight
Gate valve DN40/50 SQ14	1.05 - 1.50 m	0.75 - 1.20 m	20291	4.0 kg
	1.30 - 1.80 m	0.98 - 1.61 m	20292	5.1 kg
	1.55 - 2.00 m	1.08 - 1.82 m	20293	5.6 kg
	1.75 - 2.70 m	1.45 - 2.56 m	20294	7.3 kg
	2.35 - 3.90 m	1.97 - 3.60 m	20295	8.1 kg
Gate valve DN65/80 SQ17	1.05 - 1.50 m	0.74 - 1.14 m	20296	4.1 kg
	1.30 - 1.80 m	0.90 - 1.45 m	20297	4.5 kg
	1.55 - 2.00 m	1.00 - 1.65 m	20298	5.0 kg
	1.75 - 2.70 m	1.37 - 2.41 m	20299	7.1 kg
	2.35 - 3.90 m	1.97 - 3.60 m	20300	10.1 kg
Gate valve DN100-150 SQ19	1.05 - 1.20 m	0.59 - 0.84 m	20301	3.4 kg
	1.25 - 1.50 m	0.69 - 1.05 m	20302	4.2 kg
	1.30 - 1.80 m	0.85 - 1.40 m	20303	4.6 kg
	1.55 - 2.00 m	1.00 - 1.64 m	20304	5.2 kg
	1.75 - 2.70 m	1.35 - 2.41 m	20305	7.3 kg
	2.35 - 3.90 m	1.97 - 3.60 m	20306	10.2 kg
Gate valve DN175/200 SQ24	1.15 - 1.30 m	0.57 - 0.79 m	20307	4.7 kg
	1.30 - 1.80 m	0.82 - 1.25 m	20308	6.3 kg
	1.55 - 2.00 m	0.91 - 1.46 m	20309	7.0 kg
	1.75 - 2.70 m	1.26 - 2.19 m	20310	10.3 kg
	2.55 - 3.50 m	1.85 - 2.80 m	20311	12.2 kg
Gate valve DN250-350 SQ27	1.15 - 1.30 m	0.55 - 0.80 m	20312	5.3 kg
	1.35 - 1.80 m	0.76 - 1.15 m	20313	6.6 kg
	1.55 - 2.00 m	0.91 - 1.45 m	20314	7.5 kg
	1.85 - 2.70 m	1.21 - 2.05 m	20315	9.4 kg
	2.55 - 3.50 m	2.01 - 3.16 m	20316	12.6 kg
Gate valve DN400/450 SQ32	1.45 - 1.60 m	0.61 - 0.84 m	20317	7.1 kg
	1.65 - 2.05 m	0.81 - 1.22 m	20318	7.3 kg
	2.05 - 2.90 m	1.25 - 2.09 m	20319	10.3 kg
	2.55 - 3.50 m	1.85 - 3.00 m	20320	14.2 kg
Gate valve DN500/600 SQ36	1.50 - 1.65 m	0.58 - 0.76 m	20321	8.5 kg
	1.70 - 2.10 m	0.80 - 1.16 m	20322	9.7 kg
	2.15 - 2.70 m	1.18 - 1.86 m	20323	12.1 kg
	2.55 - 3.50 m	1.85 - 2.80 m	20324	16.5 kg

*Cover depth measurements depend on the height of the valve used, see p. 11.

**Other lengths available upon request.