



## Telescopic Spindle Extension T3 with flange bell

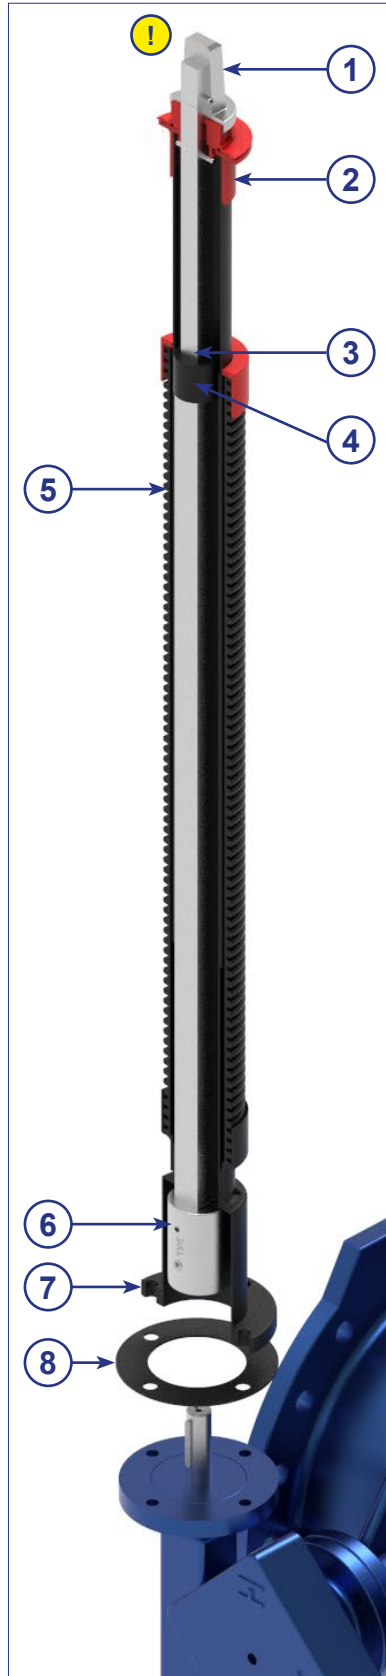

# SPINDLE EXTENSIONS FOR BUTTERFLY VALVES

## Telescopic Spindle Extension T3 with flange bell

Valve Keyway	Cover depth CD / L*	without position indicator		prepared for position indicator**		
		Article No.	Weight	Article No.	Weight	
Ø16 mm	1.00 - 1.50 m	71100.16	5.5 kg	71100.16.Z	Spindle Extension + required position indicator	
	1.20 - 1.80 m	71101.16	6.1 kg	71101.16.Z		
	1.70 - 2.70 m	71102.16	7.3 kg	71102.16.Z		
	2.50 - 3.20 m	71103.16	9.4 kg	71103.16.Z		
Ø18 mm	1.00 - 1.50 m	71100.18	5.5 kg	71100.18.Z	Spindle Extension + required position indicator	
	1.20 - 1.80 m	71101.18	6.1 kg	71101.18.Z		
	1.70 - 2.70 m	71102.18	7.3 kg	71102.18.Z		
	2.50 - 3.20 m	71103.18	9.4 kg	71103.18.Z		
Ø20 mm	1.00 - 1.50 m	71100.20	5.5 kg	71100.20.Z	Spindle Extension + required position indicator	
	1.20 - 1.80 m	71101.20	6.1 kg	71101.20.Z		
	1.70 - 2.70 m	71102.20	7.3 kg	71102.20.Z		
	2.50 - 3.20 m	71103.20	9.4 kg	71103.20.Z		
Ø22 mm	1.00 - 1.50 m	72100.22	5.5 kg	72100.22.Z	Spindle Extension + required position indicator	
	1.20 - 1.80 m	72101.22	6.1 kg	72101.22.Z		
	1.70 - 2.70 m	72102.22	7.3 kg	72102.22.Z		
	2.50 - 3.20 m	72103.22	9.4 kg	72103.22.Z		
Ø30 mm	1.00 - 1.50 m	73100.30	5.5 kg	73100.30.Z	Spindle Extension + required position indicator	
	1.20 - 1.80 m	73101.30	6.1 kg	73101.30.Z		
	1.70 - 2.70 m	73102.30	7.3 kg	73102.30.Z		
	2.50 - 3.20 m	73103.30	9.4 kg	73103.30.Z		

\*Other lengths available upon request.

\*\*Please note that the spindle extensions are prepared for a position indicator. The required position indicator can be found on p. 66.

## Protective cover

Description	Article No.	Weight
Protective cover for mechanical position indicator with operating cap	11648	0.17 kg



## Adapter disk

Description	Article No.	Weight
Adapter disk F14 for F10 bell	12770.10	0.08 kg

