


Mechanical position indicator, aluminium

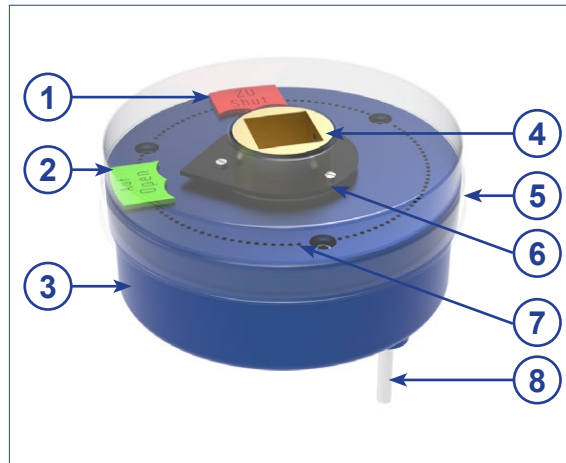

Position	Description	Material
1	red marking pin (Zu/Shut)	PA
2	green marking pin (Auf/Open)	PA
3	body (powder coating)	Cast aluminium
4	adapter with Centring-hole for square / keyway spindle extensions	Cast zinc
5	protective cover, transparent	PE
6	black pointer	S235JR epoxy
7	lid with circle of holes for marking-pins (powder coating)	Cast aluminium
8	anchoring-pin for protective-tube cap or DALMINEX supporting-plate	1.4301

max. turns/stroke	Round insert diameter		Square insert			Weight
	Ø25 mm	Ø30 mm	□ 15 mm	□ 19 mm	□ 26 mm	
13	13910.25	13910	13910.15	13910.19	13910.26	1.7 kg
47	13909.25	13909	13909.15	13909.19	13909.26	1.7 kg
140	13907.25	13907	13907.15	13907.19	13907.26	1.7 kg
470	13908.25	13908	13908.15	13908.19	13908.26	1.7 kg
1390	13918.25	13918	13918.15	13918.19	13918.26	1.7 kg

Secured with either a special DALMINEX Centring cap or DALMINEX support plate, see p. 79.

Attention! DALMINEX position indicators cannot subsequently be installed on unprepared spindle extensions!

