

Tele-EBG T3




① Vierkantschoner SW12/14




② Zentrierkappe



③ 3-fach Teleskop



④ Auszugssicherung



⑤ PLUS-Sicherung




⑥ Stufenglocke




⑦ Kuppelmuffe



⑧ Clip-Stift



⑨ Glockendichteinsatz

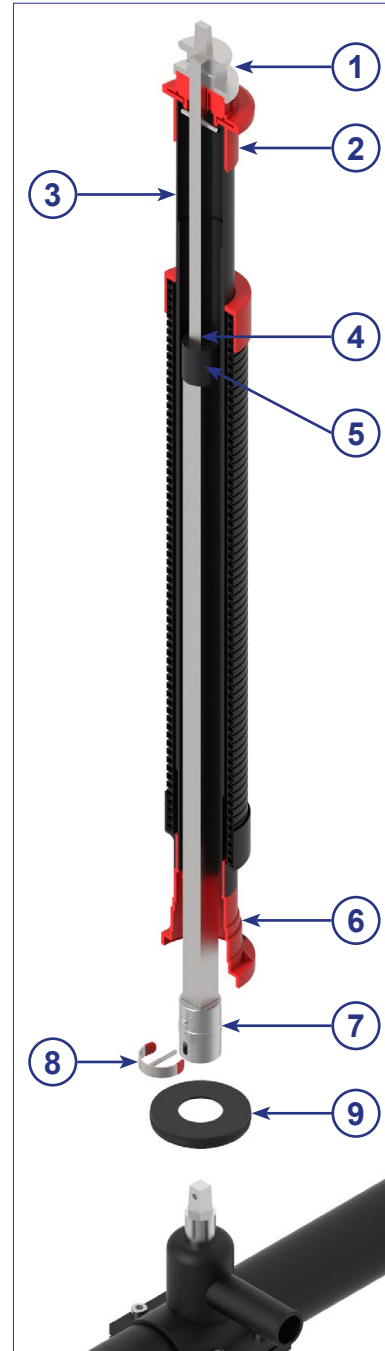

Armatur Spindel-VKT	RD* Rohrdeckung	Gesamtlänge GL** Gestänge	Artikel-Nr.	Gewicht	VE (EURO-Gibo)
Anbohrarmatur VAA SW12	0,70 - 1,00 m	0,47 - 0,73 m	10088.T3	1,9 kg	100
	0,85 - 1,30 m	0,62 - 1,02 m	14004.T3	2,3 kg	100
	1,00 - 1,50 m	0,78 - 1,33 m	14005.T3	3,0 kg	70
	1,25 - 1,80 m	0,93 - 1,63 m	14006.T3	3,0 kg	70
	1,50 - 2,00 m	1,03 - 1,80 m	14007.T3	3,5 kg	70
	1,70 - 2,70 m	1,42 - 2,38 m	14094.T3	4,8 kg	-

VE = Lieferung nur in Verpackungseinheiten!

*Rohrdeckungsmaße sind abhängig von der Höhe der eingesetzten Armatur, siehe S. 11.

**Sonderlängen auf Anfrage!

Technische Änderungen vorbehalten!

scan me!

